



- Rodent Resistant
- Expands to 150%
- Economical and Easy To Install
- Cut and Abrasion Resistance

Nominal Size	Part #	Min Expans.	Max Expans.	Put-Ups		Available Colors	Lbs/ 100'
				Bulk Spool	Shop Spool		
1/4"	RR30.25DB	1/8"	3/8"	1,000'	200'	DB	0.39
3/8"	RRN0.38DB	3/16"	1/2"	500'	125'	DB	0.57
1/2"	RRN0.50DB	1/4"	3/4"	500'	100'	DB	0.77
5/8"	RRN0.63DB	3/8"	1"	500'	100'	DB	0.95
3/4"	RRN0.75DB	1/2"	1 1/4"	250'	75'	DB	1.20
1"	RRN1.00DB	5/8"	1 5/8"	250'	65'	DB	1.34
1 1/4"	RRN1.25DB	3/4"	1 3/4"	250'	50'	DB	1.60
1 1/2"	RRN1.50DB	1"	2 1/8"	200'	40'	DB	1.96
1 3/4"	RRN1.75DB	1 1/4"	2 3/4"	200'	30'	DB	2.45
2"	RRN2.00DB	1 1/2"	3 1/2"	200'	50'	DB	2.60
2 1/2"	RRN2.50DB	1 3/4"	3 5/8"	200'	50'	DB	3.80



Cut Cleanly  
Hot Knife

#### Material

Polyethylene Terephthalate

#### Grade

RRN

#### Wall Thickness

.010


## Rodent Resistant - The Latest Innovation Against Pesky Rodents

Flexo Rodent Resistant (RRN) is the latest solution from Techflex for fighting the harmful effects of unprotected wires which are exposed to rodents. Muskrats, mice, rats, and other rodents have never ending time to find and destroy wiring and hose systems. Techflex has once again combined our knowledge of technical filaments and braided protection sleeves to create an amazing rodent resistant sleeve.

Our new flexible wire and hose braided conduit makes a very repulsive meal for any critter. In our own in-house testing, rodents completely avoided our new Flexo RRN even when stuffed with food. Make your wires and hoses an unappealing midnight snack with new Flexo Rodent Resistant!

Important: Please use caution while handling RRN. May cause skin and/or eye irritation.

Colors Available:  
Dark Brown (DB)

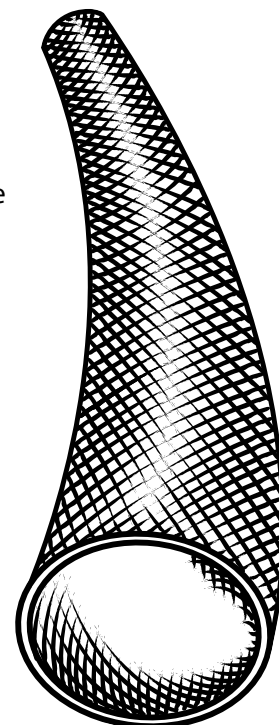

**TECHFLEX**  
Braided Sleeving Products

[www.techflex.com](http://www.techflex.com)

800.323.5140 • 973.300.9242 • fax: 973.300.9409  
104 Demarest Road • Sparta, NJ 07871



## ABRASION

**Abrasion Resistance**  
**Medium**

## CHEMICAL RESISTANCE


1=No Effect    4=More Affected  
2=Little Effect    5=Severely Affected  
3=Affected

Aromatic Solvents _____	2
Aliphatic Solvents _____	1
Chlorinated Solvents _____	3
Weak Bases _____	1
Salts _____	1
Strong Bases _____	2
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	3
Strong Oxidants _____	2
Esters/Ketones _____	1
UV Light _____	1
Petroleum _____	1
Fungus ASTM G-21 _____	1
Halogen Free _____	Yes
RoHS _____	Yes

**Melt Point**  
ASTM D-2117  
**482°F (250°C)**

**Maximum Continuous**  
Mil-I-23053  
**257°F (125°C)**

**Minimum Continuous**  
**-94°F (-70°C)**



## PHYSICAL PROPERTIES

Monofilament Diameter \_\_\_\_\_ .010  
Recommended Cutting \_\_\_\_\_ Hot-Knife  
Colors \_\_\_\_\_ 1  
Wall Thickness \_\_\_\_\_ .025