
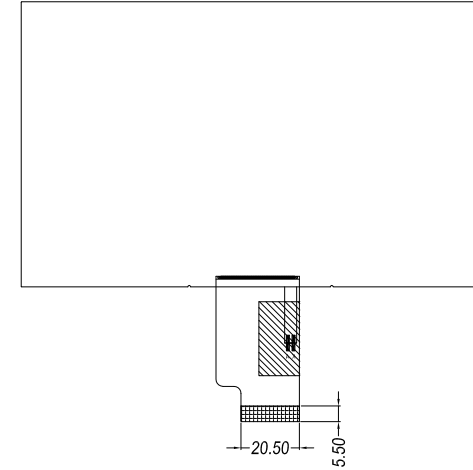
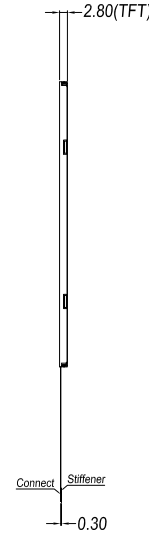



ISSUE	MODIFY DESCRIPTION	DATE
1.0	First Issue	2016.05.12

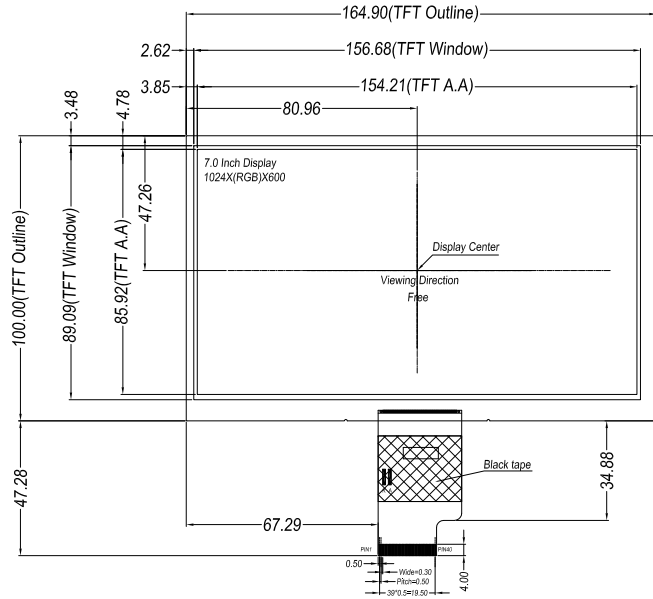


TFT ASSIGNMENT:

PIN	SYMBLE
1	VCOM
2	VDD
3	VDD
4	NC
5	RESET
6	STBYB
7	GND
8	RXIN0-
9	RXIN0+
10	GND
11	RXIN1-
12	RXIN1+
13	GND
14	RXIN2-
15	RXIN2+
16	GND
17	RXCLKIN-
18	RXCLKIN+
19	GND
20	RXIN3-
21	RXIN3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	NC
28	SELB
29	AVDD
30	GND
31	LED-
32	LED-
33	L/R
34	U/D
35	VGL
36	NC
37	NC
38	VGH
39	LED+
40	LED+

Display Type	Transmissive, Normally Black
Display Resolution	1024(RGB)X600
Viewing Angle	Free
LCD Controller/Driver	/
LCD Driving Voltage	3.3V
Operation Temperature	-20°C TO 70°C
Storage Temperature	-30°C TO 80°C
Backlight Speciality	24PCS LEDS, Vf=9.6V, If=160mA
Remark	All materials in the drawing comply with the ROHS

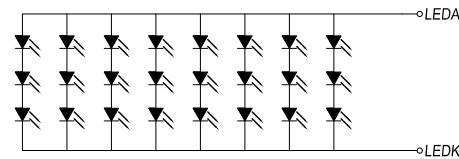

LED Diagram Circuit

TITLE:	LCM Outline		
PROJECT NO:	RK070CU01		
DESCRIPTION:	7.0 Inch TFT		
GENERAL TOLERANCE:	±0.2		
<b>Rocktech Displays Limited</b>			
 THIRD ANGLE PROJECTION			
	NAME	SIGN	DATE
DRAWN	Marvin Zhou		2016.05.12
CHECKED	Marvin Zhou		2016.05.12
REV: 1.0	UNIT: MM	SCALE: 1/1	SHEET: 1 OF 1